



JDV
CONTROL
VALVES



JEW/JEV Series

Pneumatic Actuator



JMV Series

Manual Override





DESIGN AND CONSTRUCTION


DESIGN

JEW/JEV series pneumatic actuators have introduced improvement design for rack and pinion. It is always Duria's mission to offer initiative products by combining the long field experiences in products application and the latest production and materials technology available in the market today. The benefit of new design has long been verified in practice. With new technical features equipped, Duria series pneumatic actuators have advantageous characteristic in:

- Reliability
- High performance
- Fully compliance with all the latest international standards
- Extensive products range allows best versatility at lower price
- Innovations and patented solutions for a universal drive shaft
- Multifunction position indicator
- Compact and light

CONSTRUCTION

1. A single compact design utilizing identical body and end caps for both double acting and spring return models. This feature reduces inventory and allows field conversion, by adding or removing modular spring cartridges.
2. Full conformance to following latest specifications: ISO 5211, DIN 3337 and VDI/VDE 3845 for product interchangeability and easy mounting of solenoids, limit switches and other accessories.
3. Dual piston rack and pinion design for compact construction, symmetric mounting position, high-cycle life and fast operation. Reverse rotation can be accomplished in the field by simply inverting the pistons.
4. Two independent external travel stop adjustments permit easy and precise adjustment of $\pm 4^\circ$ in both directions. This adjustment may be made in either the open or closed position and provides for accurate valve alignment.
5. Multiple bearings and guides on pistons and racks for precise operation, low friction, high cycle life and a blowout proof pinion shaft.
6. Electroless nickel-plated blowout resistant, bearing guided, one-piece pinion shaft for improved safety and maximum cycle life.
7. High precision teeth on piston racks and pinion shaft for accurate positioning, low backlash, and maximum engagement resulting in overall efficient operation.
8. Extruded aluminum body with both internal and external corrosion protections having a honed cylinder surface for longer life and a lower coefficient of friction.
9. Modular preloaded spring cartridges designed with coated springs for simple range versatility, greater safety and corrosion resistance.
10. Selected high quality bearings and seals that provide a wide operating temperature range, low friction, and high cycle life.
11. Internal and external stainless steel fasteners for long term corrosion resistance.
12. Multifunctional position indicator for visual position indication, and a direct, easy, economical way to mount popular sensors.

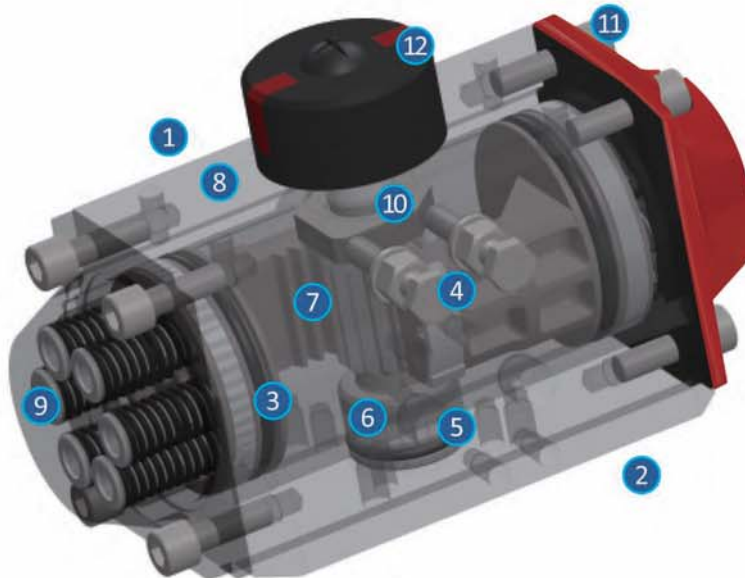

RANGE OF OPTIONS, QUALITY MANUFACTURING, AND ACCESSORIES

RANGE OF OPTIONS

- A. Stainless steel 304 or 316 drive shafts are available on request for all sizes no matter the type of corrosion protection selected.
- B. For extremely high or low temperature applications, all models may be equipped with FPM or Silicon O rings along with an Duria tested and certified suitable lubricant.
- C. Other than the standard double square bottom drive shaft connection, we can supply a keyed drive connection, a flat head connection or a special personalized drive connection.


QUALITY MANAGEMENT

- Production conforms to ISO9001.
- Each individual actuator has been factory inspected and tested and given a serial number for full traceability.

ACCESSORIES AVAILABLE

- Different Square reductions suitable for drive shaft
- Centering rings for all sizes
- Brackets
- Couplings
- Solenoid valves
- Switch boxes
- Proximity switches
- Gear boxes
- Positioners

METRIC TORQUE RATINGS

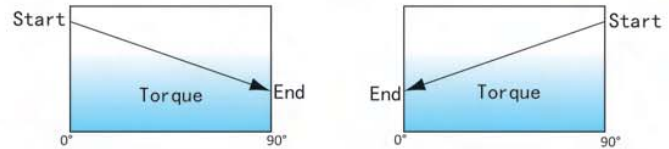Drehmomentdiagramm
doppelt wirkends stellantriebeDrehmomentdiagramm
einfach wirkende stellantriebe

DOUBLE ACTING TORQUE RATINGS IN Nm

Model	Supply Pressure (Unit: bar)									
	2.5	3	3.5	4	4.5	5	5.5	6	7	8
JEW-032	2.9	3.4	4.0	4.6	5.3	5.9	6.5	7.1	8.3	9.5
JEW-050	8.6	10.4	12.3	14.2	16.0	17.9	19.8	21.6	25.4	29.1
JEW-065	17.4	21.2	25.0	28.7	32.5	36.3	40.1	43.9	51.4	59.0
JEW-075	27.0	32.9	38.8	44.7	50.5	56.4	62.3	68.2	79.9	91.7
JEW-085	39.7	48.3	56.9	65.6	74.2	82.8	91.4	100.1	117.3	134.6
JEW-095	55.7	67.9	80.0	92.1	104.2	116.4	128.5	140.6	164.8	189.1
JEW-110	72.0	89.3	105.0	120.6	136.3	152.0	167.6	183.3	214.6	245.9
JEW-125	128.7	159.5	187.5	215.4	243.4	271.4	299.4	327.4	383.3	439.3
JEW-140	196	237	278	319	360	401	442	483	565	647
JEW-160	263.5	326.6	383.9	441.2	498.5	555.8	613.1	670.4	785.0	899.7
JEW-190	428.5	518.0	607.3	696.6	785.9	875.3	964.6	1053.9	1232.5	1411.1
JEW-210	598.2	723.2	847.9	972.6	1097.3	1222.0	1346.6	1471.3	1720.7	1970.1
JEW-240	928.3	1122.0	1315.0	1508.0	1702.0	1895.0	2089.0	2282.0	2669.0	3056.0
JEW-270	1305.0	1577.0	1849.0	2121.0	2393.0	2665.0	2937.0	3209.0	3753.0	4297.0
JEW-300	1678.6	2029.4	2379.3	2729.2	3079.1	3429.0	3778.9	4128.8	4828.5	5528.3
JEW-350	2492.5	3011.8	3531.1	4050.4	4569.7	5089.0	5608.2	6127.5	7166.0	8204.6
JEW-400	3798.1	4589.4	5380.7	6172.0	6963.3	7754.5	8545.8	9337.1	10919.7	12502.2

SINGLE ACTING TORQUE RATINGS IN Nm

Model	Supply Pressure (Unit: bar)																				Spring stroke	
	2.5		3		3.5		4		4.5		5		5.5		6		7		8			
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°		
JEV-050-05	5.1	3.4	6.9	5.3	8.8	7.2	10.7	9.0	12.5	10.9	14.4	12.8	16.3	14.6	18.1	16.5	21.9	20.2	25.6	23.9	5.2	3.5
JEV-050-06	4.4	2.4	6.2	4.3	8.1	6.1	10.0	8.0	11.8	9.9	13.7	11.7	15.6	13.6	17.4	15.5	21.2	19.2	24.9	22.9	6.2	4.2
JEV-050-07			5.5	3.2	7.4	5.1	9.3	7.0	11.1	8.8	13.0	10.7	14.9	12.6	16.7	14.4	20.5	18.2	24.2	21.9	7.2	4.9
JEV-050-08					6.7	4.1	8.6	5.9	10.4	7.8	12.3	9.7	14.2	11.5	16.0	13.4	19.8	17.1	23.5	20.9	8.2	5.6
JEV-050-09							7.9	4.9	9.7	6.8	11.6	8.6	13.5	10.5	15.3	12.4	19.1	16.1	22.8	19.8	9.3	6.3
JEV-050-10									9.0	5.7	10.9	7.6	12.8	9.5	14.6	11.3	18.4	15.1	22.1	18.8	10.3	7.0
JEV-050-11											10.2	6.6	12.1	8.4	13.9	10.3	17.7	14.0	21.4	17.8	11.3	7.7
JEV-050-12													11.4	7.4	13.2	9.3	17.0	13.0	20.7	16.7	12.4	8.4
JEV-065-05	8.7	4.3	12.5	8.1	16.3	11.9	20.0	15.6	23.8	19.4	27.6	23.2	31.4	27.0	35.2	30.8	42.7	38.3	50.3	45.9	13.1	8.7
JEV-065-06	7.0	1.7	10.7	5.5	14.5	9.2	18.3	13.0	22.1	16.8	25.9	20.6	29.7	24.4	33.4	28.2	41.0	35.7	48.6	43.3	15.7	10.4
JEV-065-07			9.0	2.8	12.8	6.6	16.6	10.4	20.4	14.2	24.1	18.0	27.9	21.8	31.7	25.5	39.3	33.1	46.8	40.7	18.3	12.2
JEV-065-08					11.0	4.0	14.8	7.8	18.6	11.6	22.4	15.4	26.2	19.1	30.0	22.9	37.5	30.5	45.1	38.1	21.0	13.9
JEV-065-09							13.1	5.2	16.9	9.0	20.7	12.7	24.4	16.5	28.2	20.3	35.8	27.9	43.4	35.4	23.6	15.7
JEV-065-10									15.1	6.3	18.9	10.1	22.7	13.9	26.5	17.7	34.0	25.2	41.6	32.8	26.2	17.4
JEV-065-11											17.2	7.5	21.0	11.3	24.7	15.1	32.3	22.6	39.9	30.2	28.8	19.1
JEV-065-12													19.2	8.7	23.0	12.4	30.6	20.0	38.1	27.6	31.4	20.9
JEV-075-05	16.3	10.2	22.2	16.0	28.1	21.9	34.0	27.8	39.8	33.7	45.7	39.6	51.6	45.4	57.5	51.3	69.2	63.1	81.0	74.8	16.9	10.7
JEV-075-06	14.2	6.8	20.1	12.7	25.9	18.6	31.8	24.4	37.7	30.3	43.6	36.2	49.4	42.1	55.3	47.9	67.1	59.7	78.8	71.4	20.2	12.8
JEV-075-07			17.9	9.3	23.8	15.2	29.7	21.1	35.6	26.9	41.4	32.8	47.3	38.7	53.2	44.6	64.9	56.3	76.7	68.1	23.6	15.0
JEV-075-08					21.7	11.8	27.5	17.7	33.4	23.6	39.3	29.4	45.2	35.3	51.0	41.2	62.8	53.0	74.5	64.7	27.0	17.1
JEV-075-09							25.4	14.3	31.3	20.2	37.1	26.1	43.0	32.0	48.9	37.8	60.7	49.6	72.4	61.3	30.3	19.3
JEV-075-10									29.1	16.8	35.0	22.7	40.9	28.6	46.8	34.5	58.5	46.2	70.3	58.0	33.7	21.4
JEV-075-11											32.9	19.3	38.7	25.2	44.6	31.1	56.4	42.8	68.1	54.6	37.1	23.5
JEV-075-12													36.6	21.8	42.5	27.7	54.2	39.5	66.0	51.2	40.4	25.7
JEV-085-05	23.2	13.7	31.8	22.3	40.4	30.9	49.0	39.5	57.6	48.1	66.3	56.8	74.9	65.4	83.5	74.0	100.8	91.3	118.0	108.5	26.1	16.6
JEV-085-06	19.8	8.4	28.4	17.0	37.1	25.7	45.7	34.3	54.3	42.9	62.9	51.5	71.6	60.2	80.2	68.8	97.4	86.0	114.7	103.3	31.3	19.9
JEV-085-07			25.1	11.8	33.8	20.5	42.4	29.1	51.0	37.7	59.6	46.3	68.3	55.0	76.9	63.6	94.1	80.8	111.4	98.1	36.5	23.2
JEV-085-08					30.4	15.2	39.1	23.9	47.7	32.5	56.3	41.1	64.9	49.7	73.6	58.4	90.8	75.6	108.1	92.9	41.7	26.5
JEV-085-09							35.8	18.7	44.4	27.3	53.0	35.9	61.6	44.5	70.3	53.2	87.5	70.4	104.8	87.7	46.9	29.8
JEV-085-10									41.1	22.1	49.7	30.7	58.3	39.3	67.0	48.0	84.2	65.2	101.5	82.5	52.1	33.1
JEV-085-11											46.4	25.5	55.0	34.1	63.6	42.7	80.9	60.0	98.1	77.2	57.3	36.4
JEV-085-12													51.7	28.9	60.3	37.5	77.6	54.8	94.8	72.0	62.5	39.7
JEV-095-05	33.6	20.9	45.8	33.0	57.9	45.1	70.0	57.3	82.1	69.4	94.3	81.5	106.4	93.6	118.5	105.8	142.7	130.0	167.0	154.2	34.9	22.1
JEV-095-06	29.2	13.9	41.4	26.1	53.5	38.2	65.6	50.3	77.7	62.4	89.8	74.5	102.0	86.7	114.1	98.8	138.3	123.0	162.6	147.3	41.8	26.5
JEV-095-07			36.9	19.1	49.1	31.2	61.2	43.3	73.3	55.4	85.4	67.6	97.5	79.7	109.7	91.8	133.9	116.1	158.1	140.3	48.8	30.9
JEV-095-08					44.6	24.2	56.8	36.4	68.9	48.5	81.0	60.6	93.1	72.7	105.2	84.8	129.5	109.1	153.7	133.3	55.8	35.4
JEV-095-09							52.3	29.4	64.5	41.5	76.6	53.6	88.7	65.8	100.8	77.9	125.1	102.1	149.3	126.4	62.7	39.8
JEV-095-10									60.0	34.5	72.2	46.7	84.3	58.8	96.4	70.9	120.6	95.1	144.9	119.4	69.7	44.2
JEV-095-11											67.7	39.7	79.9	51.8	92.0	63.9	116.2	88.2	140.5	112.4	76.7	48.6
JEV-095-12													75.4	44.8	87.6	57.0	111.8	81.2	136.0	105.4	83.6	53.0
JEV-110-05	43.4	26.2	60.7	43.4	76.4	59.1	92.0	74.8	107.7	90.4	123.4	106.1	139.0	121.8	154.7	137.4	186.0	168.8	217.3	200.1	45.9	28.6
JEV-110-06	37.7	17.0	55.0	34.3	70.6	49.9	86.3	65.6	102.0	81.3	117.6	96.9	133.3	112.6	149.0	128.3	180.3	159.6	211.6	190.9	55.0	34.3
JEV-110-07			49.3	25.1	64.9	40.8	80.6	56.4	96.2	72.1	111.9	87.8	127.6	103.4	143.2	119.1	174.6	150.4	205.9	181.8	64.2	40.0
JEV-110-08					59.2	31.6	74.9	47.3	90.5	62.9	106.2	78.6	121.9	94.3	137.5	109.9	168.9	141.3	200.2	172.6	73.4	45.8
JEV-110-09							69.1	38.1	84.8	53.8	100.5	69.4	116.1	85.1	131.8	100.8	163.1	132.1	194.5	163.4	82.5	51.5
JEV-110-10									79.1	44.6	94.8	60.3	110.4	75.9	126.1	91.6	157.4	122.9	188.7	154.2	91.7	57.2
JEV-110-11											89.0	51.1	104.7	66.7	120.4	82.4	151.7	113.7	183.0	145.1	100.9	62.9
JEV-110-12													99.0	57.6	114.6	73.2	146.0	104.6	177.3	135.9	110.0	68.6




**JDV
CONTROL
VALVES**



METRIC TORQUE RATINGS

SINGLE ACTING TORQUE RATINGS IN Nm																						
Model	Supply Pressure (Unit: bar)																				Spring stroke	
	2.5		3		3.5		4		4.5		5		5.5		6		7		8			
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°
JEV-125-05	77.7	48.2	108.5	78.9	136.5	106.9	164.4	134.9	192.4	162.9	220.4	190.9	248.4	218.8	276.4	246.8	332.3	302.8	388.3	358.7	80.6	51.0
JEV-125-06	67.5	32.0	98.3	62.8	126.3	90.8	154.2	118.8	182.2	146.8	210.2	174.7	238.2	202.7	266.2	230.7	322.1	286.7	378.1	342.6	96.7	61.2
JEV-125-07			88.1	46.7	116.1	74.7	144.0	102.7	172.0	130.7	200.0	158.6	228.0	186.6	256.0	214.6	311.9	270.6	367.9	326.5	112.8	71.4
JEV-125-08					105.9	58.6	133.8	86.6	161.8	114.5	189.8	142.5	217.8	170.5	245.8	198.5	301.7	254.4	357.7	310.4	128.9	81.6
JEV-125-09							123.6	70.5	151.6	98.4	179.6	126.4	207.6	154.4	235.6	182.4	291.5	238.3	347.5	294.3	145.0	91.8
JEV-125-10									141.4	82.3	169.4	110.3	197.4	138.3	225.4	166.3	281.3	222.2	337.3	278.2	161.1	102.0
JEV-125-11											159.2	94.2	187.2	122.2	215.2	150.2	271.1	206.1	327.1	262.1	177.2	112.2
JEV-125-12													177.0	106.1	205.0	134.0	260.9	190.0	316.9	246.0	193.3	122.4
JEV-140-05	114.2	74.1	155.1	115.0	196.1	156.0	237.0	196.9	277.9	237.8	318.8	278.7									122.4	82.3
JEV-140-06	97.7	49.6	138.7	90.6	179.6	131.5	220.5	172.4	261.5	213.3	302.4	254.3	343.3	295.2							146.8	98.7
JEV-140-07			122.2	66.1	163.2	107.0	204.1	147.9	245.0	188.9	285.9	229.8	326.9	270.7	367.8	311.6					171.3	115.2
JEV-140-08					146.7	82.5	187.6	123.5	228.6	164.4	269.5	205.3	310.4	246.2	351.3	287.2	433.2	369.0			195.8	131.6
JEV-140-09							171.2	99.0	212.1	139.9	253.0	180.9	294.0	221.8	334.9	262.7	416.7	344.6	498.6	426.4	220.2	148.1
JEV-140-10									195.7	115.5	236.6	156.4	277.5	197.3	318.4	238.2	400.3	320.1	482.1	401.9	244.7	164.5
JEV-140-11											220.1	131.9	261.1	172.8	302.0	213.8	383.8	295.6	465.7	377.5	269.2	181.0
JEV-140-12												244.6	148.4	285.5	189.3	367.4	271.1	449.2	353.0	293.6	197.4	
JEV-160-05	153.5	101.3	216.6	164.4	273.9	221.7	331.2	279.0	388.5	336.3	445.8	393.6	503.1	450.9	560.4	508.2	675.0	622.8	789.7	737.4	162.3	110.0
JEV-160-06	131.5	68.8	194.6	131.9	251.9	189.2	309.2	246.5	366.5	303.8	423.8	361.1	481.1	418.4	538.4	475.7	653.0	590.3	767.7	705.0	194.7	132.0
JEV-160-07			172.6	99.5	229.9	156.8	287.2	214.1	344.5	271.4	401.8	328.7	459.1	386.0	516.4	443.3	631.0	557.9	745.7	672.5	227.2	154.0
JEV-160-08					207.9	124.3	265.2	181.6	322.5	238.9	379.8	296.2	437.1	353.5	494.4	410.8	609.0	525.4	723.7	640.1	259.6	176.0
JEV-160-09							243.2	149.2	300.5	206.5	357.8	263.8	415.1	321.1	472.4	378.4	587.0	493.0	701.7	607.6	292.1	198.0
JEV-160-10									278.5	174.0	335.8	231.3	393.1	288.6	450.4	345.9	565.0	460.5	679.7	575.2	324.5	220.0
JEV-160-11											313.8	198.9	371.1	256.2	428.4	313.5	543.0	428.1	657.7	542.7	357.0	242.0
JEV-160-12												349.1	223.7	406.4	281.0	521.0	395.6	635.7	510.3	389.4	264.0	
JEV-190-05	257.0	162.8	346.5	252.3	435.8	341.6	525.1	430.9	614.4	520.2	703.8	609.5	793.1	698.8	882.4	788.1	1061.0	966.7	1239.6	1145.4	265.8	171.5
JEV-190-06	222.7	109.6	312.2	199.1	401.5	288.4	490.8	377.7	580.1	467.0	669.5	556.4	758.8	645.7	848.1	735.0	1026.7	913.6	1205.3	1092.2	318.9	205.8
JEV-190-07			277.9	146.0	367.2	235.3	456.5	324.6	545.8	413.9	635.2	503.2	724.5	592.5	813.8	681.8	992.4	860.4	1171.0	1039.1	372.1	240.1
JEV-190-08					332.9	182.1	422.2	271.4	511.5	360.7	600.9	450.1	690.2	539.4	779.5	628.7	958.1	807.3	1136.7	985.9	425.2	274.4
JEV-190-09							387.9	218.3	477.2	307.6	566.6	396.9	655.9	486.2	745.2	575.5	923.8	754.1	1102.4	932.8	478.4	308.7
JEV-190-10									442.9	254.4	532.3	343.8	621.6	433.1	710.9	522.4	889.5	701.0	1068.1	879.6	531.5	343.0
JEV-190-11											498.0	290.6	587.3	379.9	676.6	469.2	855.2	647.8	1033.8	826.5	584.7	377.3
JEV-190-12												553.0	326.8	642.3	416.1	820.9	594.7	999.5	773.3	637.8	411.6	
JEV-210-05	352.8	239.1	477.8	364.1	602.5	488.8	727.2	613.5	851.9	738.2	976.6	862.9	1101.2	987.5	1225.9	1112.2	1475.3	1361.6	1724.7	1611.0	359.1	245.4
JEV-210-06	303.7	167.3	428.7	292.3	553.4	417.0	678.1	541.7	802.8	666.4	927.5	791.0	1052.2	915.7	1176.9	1040.4	1426.2	1289.8	1675.6	1539.2	430.9	294.5
JEV-210-07			379.6	220.5	504.3	345.2	629.0	469.8	753.7	594.5	878.4	719.2	1003.1	843.9	1127.8	968.6	1377.2	1218.0	1626.5	1467.4	502.7	343.6
JEV-210-08					455.3	273.3	579.9	398.0	704.6	522.7	829.3	647.4	954.0	772.1	1078.7	896.8	1328.1	1146.2	1577.5	1395.5	574.6	392.6
JEV-210-09							530.9	326.2	655.6	450.9	780.2	575.6	904.9	700.3	1029.6	825.0	1279.0	1074.3	1528.4	1323.7	646.4	441.7
JEV-210-10									606.5	379.1	731.2	503.8	855.8	628.4	980.5	753.1	1229.9	1002.5	1479.3	1251.9	718.2	490.8
JEV-210-11											682.1	431.9	806.8	556.6	931.5	681.3	1180.8	930.7	1430.2	1180.1	790.0	539.9
JEV-210-12												757.7	484.8	882.4	609.5	1131.8	858.9	1381.1	1108.3	861.8	589.0	
JEV-240-05	517.8	374.3	711.2	567.7	904.6	761.1	1098.0	954.5	1291.4	1147.9	1484.8	1341.3									554.0	410.5
JEV-240-06	435.7	263.5	629.1	456.9	822.5	650.3	1015.9	843.7	1209.3	1037.1	1402.7	1230.5	1596.1	1423.9							664.8	492.6
JEV-240-07			547.0	346.1	740.4	539.5	933.8	732.9	1127.2	926.3	1320.6	1119.7	1514.0	1313.1	1707.4	1506.5					775.6	574.7
JEV-240-08					658.3	428.7	851.7	622.1	1045.1	815.5	1238.5	1008.9	1431.9	1202.3	1625.3	1395.7	2012.1	1782.5			886.4	656.8
JEV-240-09							769.6	511.3	963.0	704.7	1156.4	898.1	1349.8	1091.5	1543.2	1284.9	1930.0	1671.7	2316.8	2058.5	997.2	738.9
JEV-240-10									880.9	593.9	1074.3	787.3	1267.7	980.7	1461.1	1174.1	1847.9	1560.9	2234.7	1947.7	1108.0	821.0
JEV-240-11											992.2	676.5	1185.6	869.9	1379.0	1063.3	1765.8	1450.1	2152.6	1836.9	1218.8	903.1
JEV-240-12												1103.5	759.1	1296.9	952.5	1683.7	1339.3	2070.5	1726.1	1329.6	985.2	
JEV-270-05	745.9	519.4	1017.9	791.4	1289.9	1063.4	1561.8	1335.3	1833.8	1607.3	2105.7	1879.2									786.0	559.5
JEV-270-06	634.0	362.2	906.0	634.2	1178.0	906.2	1449.9	1178.1	1721.9	1450.1	1993.8	1722.0	2265.8									


INSTALLATION





JEJ-032




JEJ-032





JEJ-050-160




JEJ-050-190





JEJ-190-350



JEJ-210-350




JEJ-400




JEJ-400

VDI/VDE3845 STANDARD




JEJ/JEV-050-210




JEJ/JEV-240-400


ISO5211 STANDARD




JEJ/JEV-50-190



JEJ/JEV-32, JEJ/JEV-210-300



JEJ/JEV-350



JEJ/JEV-400

MODEL	A	B	C	L	E	F	P	I	FLANGE	Q	Q1	W	W1	Ch	T
JEJ-032	37	47	50	110	27	50	20	10	F03	—	36	—	M5×9	9×9	G1/8"
JEJ/JEV-050	45	70.5	70	154	41.5	80	20	12	F03/05	36	50	M5×7.5	M6×9	11×11	G1/4"
JEJ/JEV-065	62	89.5	89	189	51.5	80	20	16	F05/07	50	70	M6×9	M8×12	14×14	G1/4"
JEJ/JEV-075	68	102.5	100	210	59	80	20	16	F05/07	50	70	M6×9	M8×12	14×14	G1/4"
JEJ/JEV-085	68	112.5	113	229	63.5	80	20	19	F05/07	50	70	M6×9	M8×12	17×17	G1/4"
JEJ/JEV-095	92	126	123	264	71	80	20	19	F07/10	70	102	M8×12	M10×15	17×17	G1/4"
JEJ/JEV-110	93	138.5	136	266	76.5	80	20	19	F07/10	70	102	M8×12	M10×15	17×17	G1/4"
JEJ/JEV-125	96	157	161	337	85	80	30	25	F07/10	70	102	M8×12	M10×15	22×22	G1/4"
JEJ/JEV-140	110	178	178	346	97	80	30	31	F10/12	102	125	M10×15	M12×18	27×27	G1/4"
JEJ/JEV-160	112	196	200	412	106	130	30	31	F10/12	102	125	M10×15	M12×18	27×27	G1/4"
JEJ/JEV-190	136	271	232	488	112	130	30	41	F10/14	102	140	M10×15	M16×24	36×36	G1/4"
JEJ/JEV-210	140	310	255	550	120	130	30	40	F14	—	140	—	M16×24	36×36	G1/4"
JEJ/JEV-240	159	262	292	602	131	130	30	50	F16	—	165	—	M20×28	46×46	G1/2"
JEJ/JEV-270	159	295	331	672	147.5	130	30	50	F16	—	165	—	M20×28	46×46	G1/2"
JEJ/JEV-300	180	438	354	784	173	130	30	50	F16	—	165	—	M20×28	46×46	G1/2"
JEJ/JEV-350	270	470	410	845	195	130	30	50	F16/F25	165	254	M20×28	M16×30	46×46	G1/2"
JEJ/JEV-400	290	520	466	956	260	130	30	60	F25	—	254	—	M16×30	55×55	G1/2"



**JDV
CONTROL
VALVES**

JMV Series

Manual Override




Usage

This gear operator is used for butterfly valve, ball valve together with pneumatic to realize manual and pneumatic drive.

Features

- 1、 Small in volume, light weight, reasonable design and novel pattern.
- 2、 It consists of a series of products, so output torque matches with all kinds of pneumatic devices and valves.
- 3、 There are two keyways apart 90° in the inner hole of worm gear so as to be convenient for customer to choose relative position.
- 4、 Pull out the position pin and rotate off center device with 180° to realize pneumatic drive by positioning pin acted or to realign.
- 5、 The gear operator is filled with special lubricant before leaving the factory. It is solid sealed with valve after installation possessing dustproof and waterproof function with protection grade IP65.

JMV SERIES CLUTCH GEAR OPERATOR

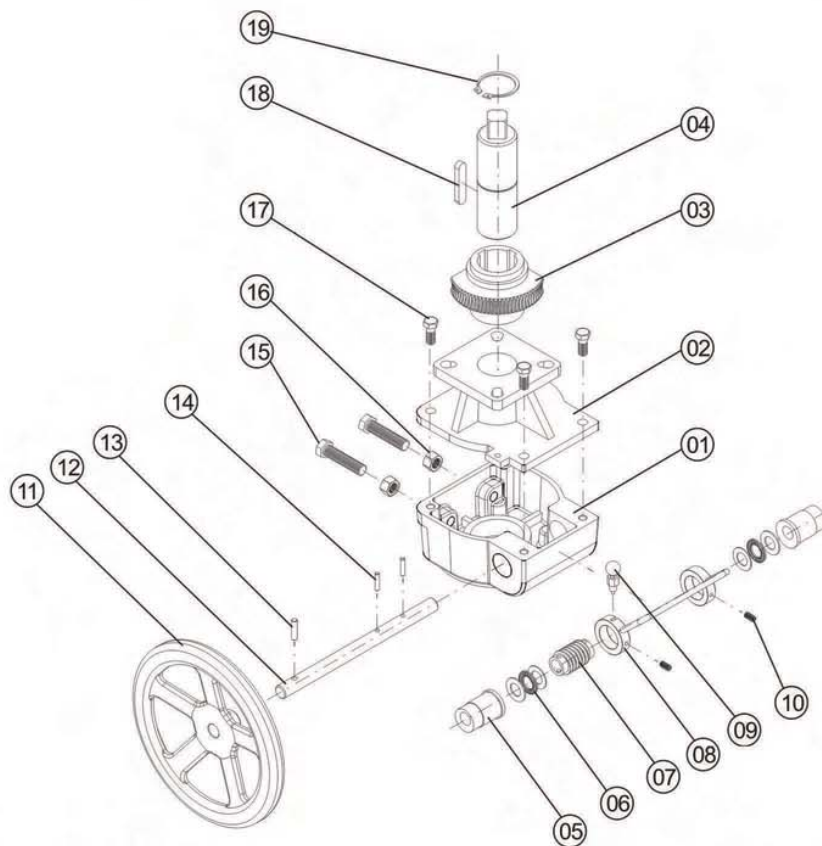



Materials and partlist

NO	Q. TY	Item	Material	Optional material
01	1	Body	Aluminium polyster coating	Carbon steel
02	1	Bracket cap	Aluminium polyster coating	Carbon steel
03	1	Worm gear	Ductile iron	
04	1	Connecting shaft	Carbon steel 45#	
05	1	Eccentric shaft	Carbon steel 45#	
06	1	Bearing assembly	Powder metallurgy	
07	1	Worm	Carbon steel 45#	
08	1	Handle	Carbon steel 45#	
09	1	The limiting assembly	Carbon steel 45#	
10	1	The set screws	Carbon steel 45#	
11	1	Hand wheel	Carbon steel 45#	
12	1	Rotating shaft	SS304	Carbon steel 45#
13	1	Pin(Hand wheel)	Carbon steel 45#	
14	1	Pin(Worm gear)	Carbon steel 45#	
15	1	Adjusting Bolt	SS304	
16	1	Adjusting Nut	SS304	
17	1	Bolt	SS304	
18	1	Key	Carbon steel 45#	
19	1	Clip spring	Spring steel	



JMV SERIES CLUTCH GEAR OPERATOR

Operator Instruction

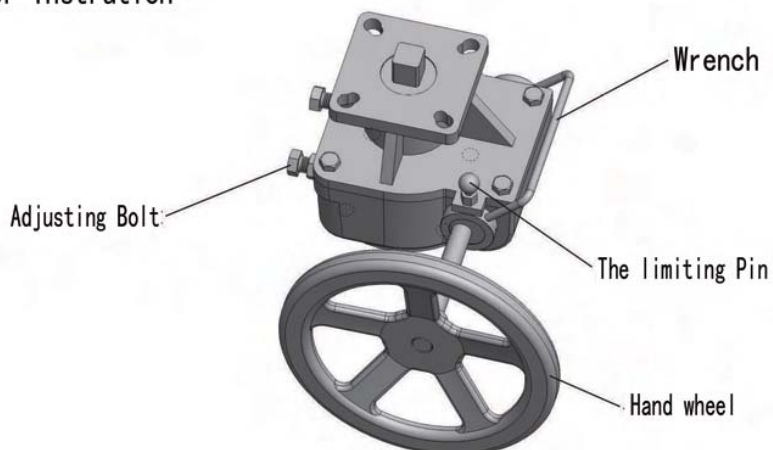

Lift the limit Pin



L to the manual



Dextrorotatory to automatic

Operator Instruction


- 1、The bottom of gear operator should be connected with valve. bracket surface connected with cylinder, valve stem go through the inner hole of worm gear and the square on the end of stem matches with square hole of cylinder. (working procedures: The cylinder drives valve stem and worm gear rotating together when pneumatic drive, and worm shaft meshes with worm gear to drive valve stem rotating along with piston of cylinder moving when manual drive. When pneumatic drive, pull out the pneumatic drive by worm gear rotated following with pneumatic valve stem. Just make the worm shaft mesh to realize manual drive.)
- 2、No mesh may occur when move handle toward outside by 180° and close the worm shaft, please rotate hand-wheel by an angle to make it.
- 3、It cannot be operated by pneumatic and manual driven at the same time.

Reference Selection

Model	Gear Ratio	Input Torque	Output Torque	Hand-wheel Di-a.	Wt(kg)
JMV-1	26: 1	50	280	Φ 180	2.6
JMV-2	28: 1	60	360	Φ 200	4
JMV-3	38: 1	90	620	Φ 280	6.5
JMV-4	54: 1	110	1310	Φ 300	13
JMV-5	80: 1	140	2600	Φ 400	32
JMV-6	78: 1	140	3500	Φ 500	43
JMV-7	98: 1	200	4200	Φ 600	65
JMV-8	100: 1	200	5500	Φ 600	95
JMV-9	320: 1	200	8000	Φ 600	125

JMV SERIES CLUTCH GEAR OPERATOR

Dimension Table

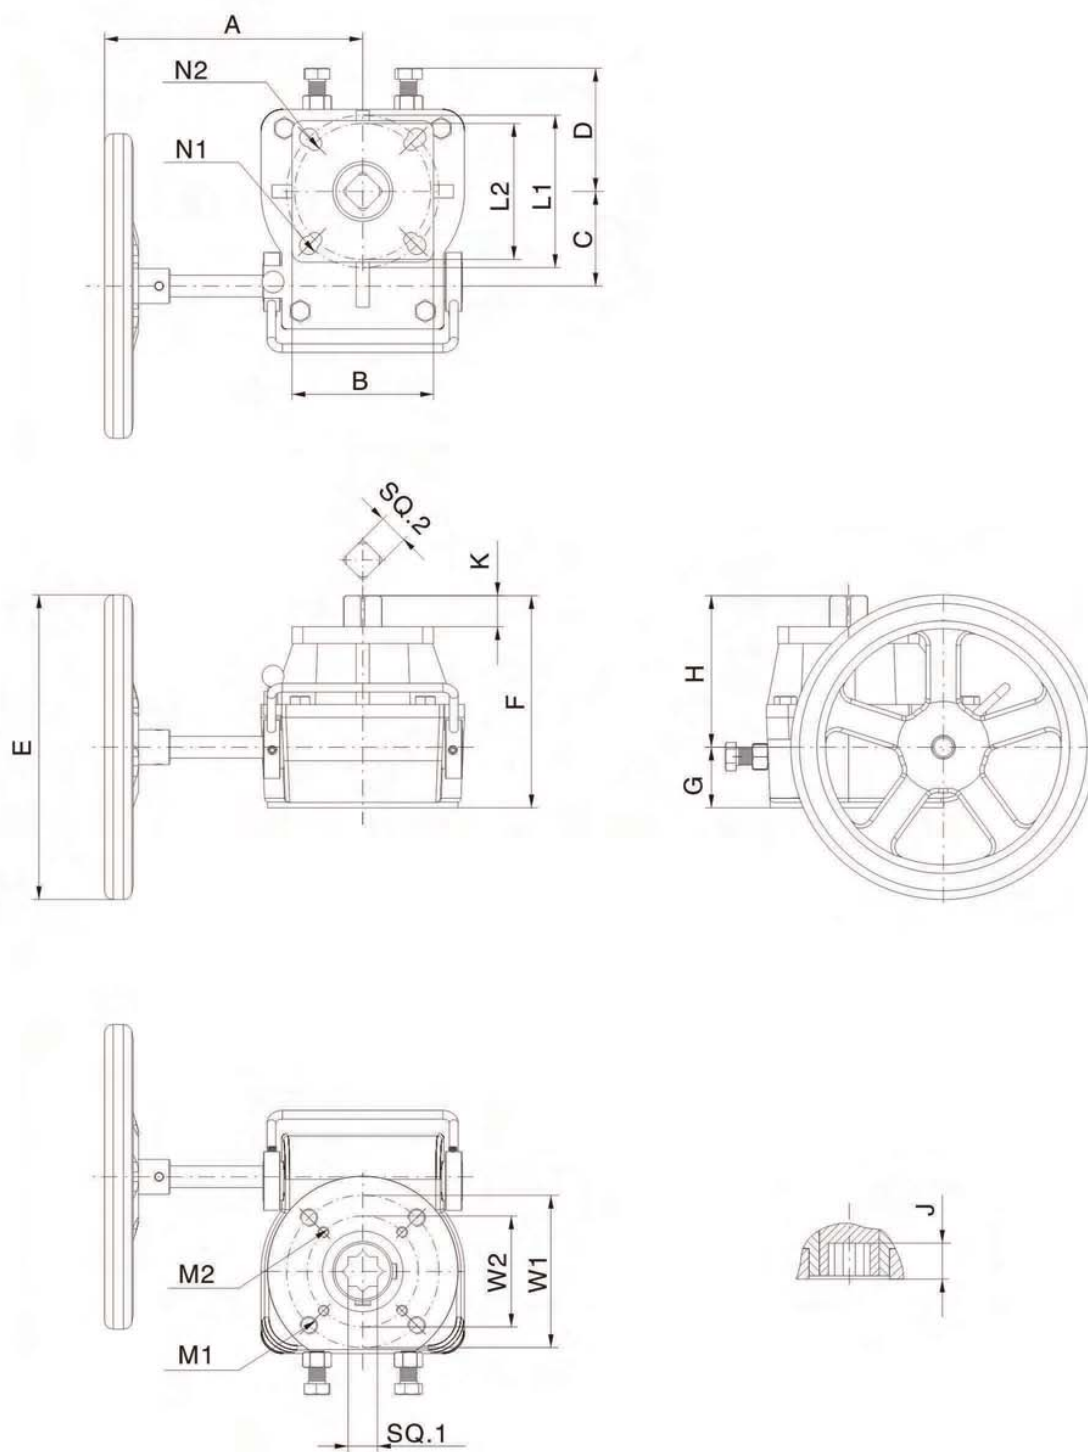



JMV SERIES CLUTCH GEAR OPERATOR


Dimension Table

Model	JMV-1	JMV-2	JMV-3	JMV-4	JMV-5	JMV-6	JMV-7	JMV-8
A	150	170	200	260	310	395	435	440
B	70	95	115	140	155	160	235	300
C	50	55	82	85	125	140	170	210
D	43	65	90	102	110	140	160	170
E	Φ180	Φ200	Φ280	Φ300	Φ400	Φ500	Φ600	Φ600
F	120	127	150	195	209	233	243	252
G	35	40	40	60	55	60	60	65
H	85	87	110	135	154	172	183	187
J	16	19	24	29	40	50	58	58
K	15	19	22	28	39	48	55	55
M1	M8X4	M10X4	M12X4	M16X4	M20X4	M20X4	M16X8	M16X8
M2	M6X4	M8X4	M10X4					
*W1	70	102	70/102/125	102/125/140	102/125/140/165	140/165	254	254
*W2	50	70	70/102/125					
SQ.1	11/14/17	14/17/19	22/27	22/27	27/36	36/46	46/55	46/55
N1	Φ10X4	Φ12X4	Φ14X4	Φ18X4	Φ22X4	Φ22X4	Φ18X8	Φ18X8
N2	Φ8X4	Φ10X4	Φ12X4	Φ16X4	Φ18X4			
*L1	70	102	70/102/125	102/125/140	125/140/165	140/165	254	254
*L2	50	70	70/102/125	102/125/140	125/140/165			
SQ.2	11/14/17	14/17/19	22/27	22/27	27/36	36/46	46/55	46/55

* Can be customized

JMV-9 SERIES CLUTCH GEAR OPERATOR

Dimension Table

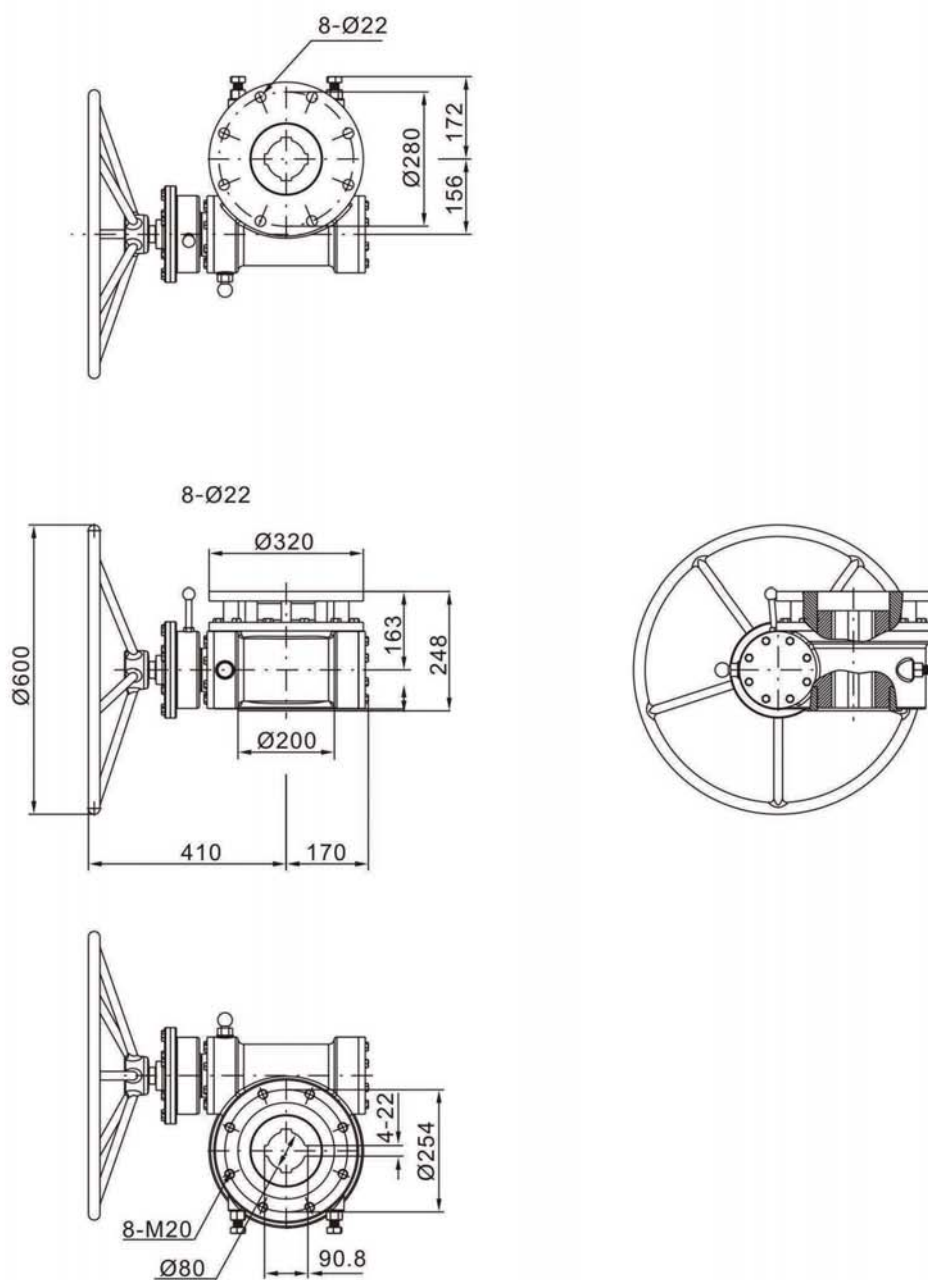



■ HEADQUARTERS

NO. 6-1, QINGNIAN RD., YANGMEI CITY, TAOYUAN COUNTY 326, TAIWAN
TEL +886-3-4965066 FAX +886-3-4963526 E-MAIL: sales@jdv.com.tw



Copyright 2014/11. All rights are reserved by JDV.
The technical date and content may be changed without prior notice.